


Tripods



®

**Precise surveying
and measuring**

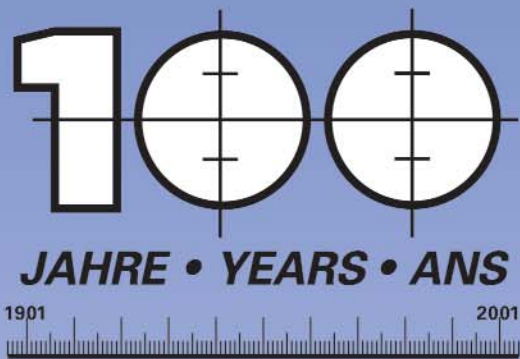

Content	Page
Short aluminium tripods	1
Aluminium tripods – lightweight type	2
Aluminium tripods	3
Wooden tripods	4
Wooden tripods – heavy-duty type	5
Aluminium tripods with elevating head	6-7
Aluminium tripods with elevating head and accessories	8
Nedo representations	9

Customer satisfaction is the yardstick of our activities – our name governs our quality.



Short aluminium tripods



Ref.-No. 200 631

Min. effective height
58 cm !

Tripod Ref.-No. 200 631

Min. effective height	appr. 0.58 m
Max. effective height	appr. 0.85 m
Retracted length	appr. 0.62 m
Weight	appr. 3.00 kg
Tripod head	flat, \varnothing 140 mm

Features: Quick-clamping system
Slip guard

Suitable for: Rotating laser
Pipe laser
Cross line laser



Ref.-No. 210 635

Tripod Ref.-No. 210 635

Min. effective height	appr. 0.73 m
Max. effective height	appr. 1.24 m
Retracted length	appr. 0.80 m
Weight	appr. 2.10 kg

Features: Adjustable range of column: 515 mm
Incl. carrying bag

Suitable for: Rotating laser
Cross line laser

Nedo short tripods are especially suitable for lightweight rotating lasers, cross line lasers and pipe lasers.



Ref.-No. 200 412

Tripod Ref.-No. 200 412

Min. effective height	appr. 0.78 m
Max. effective height	appr. 1.18 m
Retracted length	appr. 0.82 m
Weight	appr. 4.00 kg
Tripod head	flat, \varnothing 140 mm

Features: Quick-clamping system
Slip guard

Suitable for: Rotating laser
Pipe laser
Cross line laser



Ref.-No. 210 631

Telescopic tripod Ref.-No. 210 631

Min. effective height	appr. 0.69 m
Max. effective height	appr. 1.45 m
Retracted length	appr. 0.75 m
Weight	appr. 3.50 kg
Tripod head	flat, \varnothing 110 mm

Features: Telescopic extension (adjustable range: 485 mm)
Quick-clamping system
Slip guard
Circular bubble in tripod head

Suitable for: Rotating laser
Cross line laser



Nedo Quick-clamping system

Aluminium tripods – lightweight type



Ref.-No. 200 621

Tripod Ref.-No. 200 621

Min. effective height	appr. 1.00 m
Max. effective height	appr. 1.65 m
Retracted length	appr. 1.07 m
Weight	appr. 3.80 kg
Tripod head	flat, \varnothing 140 mm

Features: Quick-clamping system

Suitable for: Builders' level
Rotating laser
Cross line laser



Ref.-No. 200 621-614

Tripod Ref.-No. 200 621-614

Min. effective height	appr. 0.96 m
Max. effective height	appr. 1.65 m
Retracted length	appr. 1.07 m
Weight	appr. 4.00 kg
Tripod head	flat, \varnothing 140 mm

Features: Quick-clamping system
Slip guard

Suitable for: Builders' level
Rotating laser
Cross line laser



Ref.-No. 200 622

Tripod Ref.-No. 200 622

Min. effective height	appr. 1.02 m
Max. effective height	appr. 1.67 m
Retracted length	appr. 1.09 m
Weight	appr. 4.20 kg
Tripod head	domed, \varnothing 140 mm

Features: Quick-clamping system

Suitable for: Builders' level
Rotating laser
Cross line laser



Ref.-No. 200 625


Tripod Ref.-No. 200 625

Min. effective height	appr. 0.98 m
Max. effective height	appr. 1.68 m
Retracted length	appr. 1.05 m
Weight	appr. 3.40 kg

Tripod head
(made of high impact strength plastics) flat, \varnothing 130 mm

Features: Quick-clamping system
Circular bubble in tripod head

Suitable for: Builders' level
Rotating laser
Cross line laser

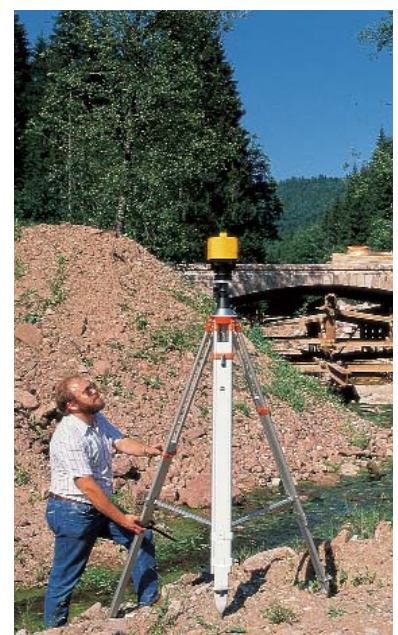

Aluminium tripods



Ref.-No. 200 200

Tripod Ref.-No. 200 200

Min. effective height	appr. 1.08 m
Max. effective height	appr. 1.72 m
Retracted length	appr. 1.14 m
Weight	appr. 5.00 kg
Tripod head	flat, \varnothing 140 mm

Features: Quick-clamping system

Suitable for: Builders' level
Builders' theodolite
Tachymeter
Rotating laser



Nedo aluminium tripods are robust and very solid and for every day use, especially for builders' levels, theodolites and rotating lasers.

Thanks to the tried and proven quick-clamping system, the tripods' legs can be extended and fixed very easily.



Ref.-No. 200 312

Tripod Ref.-No. 200 312

Min. effective height	appr. 1.04 m
Max. effective height	appr. 1.68 m
Retracted length	appr. 1.13 m
Weight	appr. 5.40 kg
Tripod head	domed, \varnothing 140 mm

Features: Quick-clamping system

Suitable for: Builders' level
Builders' theodolite



Tripod head of tripod Ref.-No. 200 524



Ref.-No. 200 524

Tripod Ref.-No. 200 524 (heavy-duty type)

Min. effective height	appr. 1.06 m
Max. effective height	appr. 1.70 m
Retracted length	appr. 1.13 m
Weight	appr. 6.40 kg
Tripod head	flat, \varnothing 167 mm

Features: Quick-clamping system
Snap Cap
Carrying strap

Suitable for: Builders' level
Builders' theodolite
Tachymeter
Rotating laser



Foot of tripod of tripod Ref.-No. 200 524

Wooden tripods



Ref.-No. 200 100

Tripod Ref.-No. 200 100

Min. effective height	appr. 1.02 m
Max. effective height	appr. 1.65 m
Retracted length	appr. 1.09 m
Weight	appr. 5.40 kg
Tripod head	flat, \varnothing 140 mm

Features: Quick-clamping system
Tripod legs plastic coated

Suitable for: Digital level
Builders' level
Builders' theodolite
Tachymeter
Rotating laser



Nedo wooden tripods are made of carefully selected ash and pine wood. All wooden parts are sealed with a high-tech plastic material that keeps moisture out. This ensures that there is no swelling, shrinking or splintering of wood and it makes Nedo wooden tripods extremely robust and weather resistant. Nedo wooden tripods are more durable than tripods with regular lacquering.



Ref.-No. 200 122

Tripod Ref.-No. 200 122

Min. effective height	appr. 1.05 m
Max. effective height	appr. 1.68 m
Retracted length	appr. 1.11 m
Weight	appr. 5.50 kg
Tripod head	domed, \varnothing 140 mm

Features: Quick-clamping system
Tripod legs plastic coated

Suitable for: Digital level
Builders' level
Builders' theodolite




Ref.-No. 200 133

Tripod Ref.-No. 200 133

Min. effective height	appr. 1.02 m
Max. effective height	appr. 1.67 m
Retracted length	appr. 1.09 m
Weight	appr. 5.10 kg
Tripod head	flat, \varnothing 140 mm

Features: Wing nut clamping system
Tripod legs plastic coated

Suitable for: Builders' level
Builders' theodolite
Tachymeter
Rotating laser

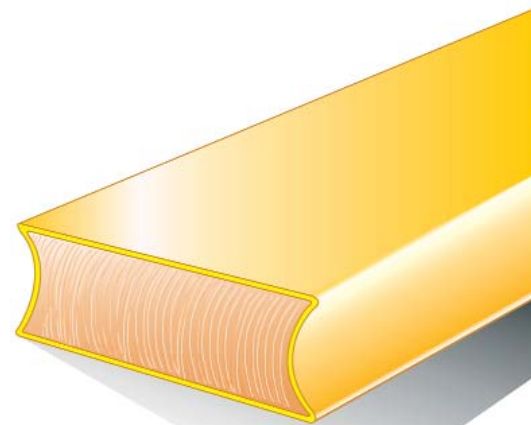

Cross-section of tripod centre leg

Thanks to the unique coating of all wooden parts, Nedo wooden tripods are extremely robust and weatherproof.

All aluminium die casting parts, such as the tripod head, joints and clamps, are powder-coated in an environmentally sound process.

Wooden tripods – heavy-duty type



Ref.-No. 200 513

Tripod Ref.-No. 200 513	
Min. effective height	appr. 1.02 m
Max. effective height	appr. 1.69 m
Retracted length	appr. 1.10 m
Weight	appr. 7.60 kg
Tripod head	flat, \varnothing 167 mm

Features: Quick-clamping system
Tripod legs plastic coated
Snap Cap
Carrying strap

Suitable for: Digital level
Theodolite
Tachymeter
Heavy-duty rotating laser



Accessory: Snap Cap
Ref.-No. 058 587-900

Protects the tripod head. Fits all heavy-duty tripods with a head- \varnothing of 167 mm.




Ref.-No. 200 533

Tripod Ref.-No. 200 533	
Min. effective height	appr. 1.05 m
Max. effective height	appr. 1.70 m
Retracted length	appr. 1.12 m
Weight	appr. 7.10 kg
Tripod head	flat, \varnothing 167 mm

Features: Wing nut clamping system
Tripod legs plastic coated
Snap Cap
Carrying strap

Suitable for: Digital level
Theodolite
Tachymeter
Heavy-duty rotating laser

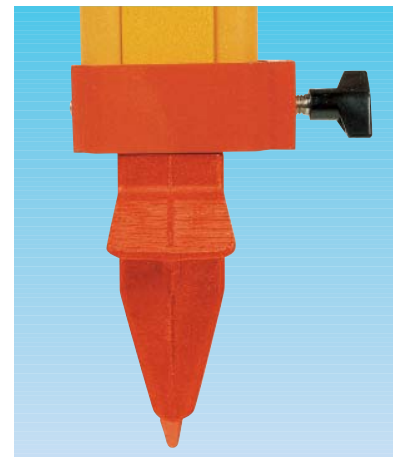

Wing nut clamping system

Plastic coated hardwood ensures outstanding stability and durability!



Ref.-No. 200 511

Tripod Ref.-No. 200 511	
Effective height	appr. 1.53 m
Retracted length	appr. 1.61 m
Weight	appr. 6.70 kg
Tripod head	flat, \varnothing 167 mm

Features: Fixed tripod legs
Tripod legs plastic coated
Snap Cap

Suitable for: Digital level
Theodolite
Tachymeter
Heavy-duty rotating laser

Aluminium tripods with elevating head



Ref.-No. 210 613
Ref.-No. 210 611

Tripod Ref.-No. 210 613

Min. effective height	appr. 0.75 m
Max. effective height	appr. 1.60 m
Retracted length	appr. 0.81 m
Weight	appr. 4.60 kg
Tripod head	flat, \varnothing 110 mm
Telescopic section	1-fold
Adjustable range of column	530 mm

Features: Direct gear
Quick-clamping system
Slip guard
Circular bubble

Suitable for: Rotating laser
Laser level

Tripod Ref.-No. 210 611

Min. effective height	appr. 0.85 m
Max. effective height	appr. 1.90 m
Retracted length	appr. 0.95 m
Weight	appr. 5.60 kg
Tripod head	flat, \varnothing 110 mm
Telescopic section	1-fold
Adjustable range of column	595 mm

Features: Direct gear
Quick-clamping system
Slip guard
Circular bubble

Suitable for: Rotating laser
Laser levels



Ref.-No. 210 614

Tripod Ref.-No. 210 614

Min. effective height	appr. 0.74 m
Max. effective height	appr. 1.73 m
Retracted length	appr. 0.88 m
Weight	appr. 5.20 kg
Tripod head	flat, \varnothing 110 mm
Telescopic section	1-fold
Adjustable range of column	555 mm

Features: Indirect gear
Quick-clamping system
Slip guard
Circular bubble

Suitable for: Rotating laser
Laser level

Slip guard is a standard feature for all Nedo tripods with elevating head!



Ref.-No. 210 612

Tripod Ref.-No. 210 612

Min. effective height	appr. 1.11 m
Max. effective height	appr. 2.36 m
Retracted length	appr. 1.20 m
Weight	appr. 5.70 kg
Tripod head	flat, \varnothing 110 mm
Telescopic section	1-fold
Adjustable range of column	595 mm

Features: Direct gear
Quick-clamping system
Slip guard
Circular bubble

Suitable for: Rotating laser



The patented Nedo *slip guard* is a stop cam integrated into the tripod hinge replacing the chains so far used.

Aluminium tripods with elevating head



Ref.-No. 210 660

Reach a minimum effective height of 55 cm thanks to additional leg struts!

Tripod Ref.-No. 210 660


Min. effective height	appr. 0.55 m
Max. effective height	appr. 2.48 m
Retracted length	appr. 1.26 m
Weight	appr. 7.20 kg
Tripod head	flat, \varnothing 110 mm
Telescopic section	2-fold
Adjustable range of column	310 + 395 mm

Features: Direct gear
Additional leg struts
Quick-clamping system
Circular bubble

Accessory: Combi tripod feet

Suitable for: Heavy-duty rotating laser

Combi tripod feet Ref.-No. 660 121

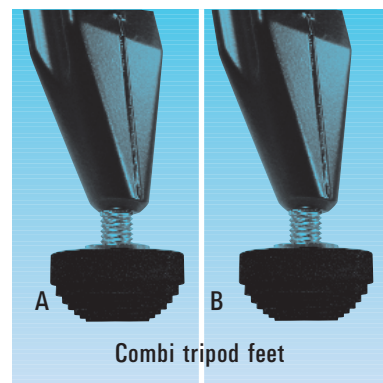

Combi tripod feet for work on rough or sensitive floors. Simply activate the foot tip (fig. A) for work on rough floors by screwing in the rubber ball. When working on sensitive floors the rubber ball is screwed out to cover the tip (fig. B).



Ref.-No. 210 670

Tripod Ref.-No. 210 670

Min. effective height	appr. 0.87 m
Max. effective height	appr. 2.85 m
Retracted length	appr. 1.12 m
Weight	appr. 7.00 kg
Tripod head	flat, \varnothing 110 mm
Telescopic section	2-fold
Adjustable range of column	595 + 695 mm

Features: Direct gear
Quick-clamping system
Slip guard
Circular bubble
Combi tripod feet

Suitable for: Rotating laser
Heavy-duty rotating laser

All Nedo elevating tripods in this series are equipped with a robust double telescope. The first stage is extended by the crank drive. The second stage is a robust sliding tube.



Ref.-No. 210 675

Tripod Ref.-No. 210 675

Min. effective height	appr. 0.80 m
Max. effective height	appr. 2.40 m
Retracted length	appr. 1.04 m
Weight	appr. 7.70 kg
Tripod head	flat, \varnothing 110 mm
Telescopic section	2-fold
Adjustable range of column	490 + 520 mm

Features: Indirect gear
Reinforced telescopes
Quick-clamping system
Circular bubble

Accessory: Combi tripod feet

Suitable for: Rotating laser,
Heavy-duty rotating laser



Twofold telescopic section

Aluminium tripods with elevating head and accessories



Ref.-No. 210 680

Tripod Ref.-No. 210 680

Min. effective height	appr. 0.85 m
Max. effective height	appr. 3.02 m
Retracted length	appr. 1.32 m
Weight	appr. 8.75 kg
Tripod head	flat, \varnothing 110 mm
Telescopic section	2-fold
Adjustable range of column	555 + 590 mm


Features: Indirect gear
Reinforced telescopes
Additional leg struts
Quick-clamping system
Circular bubble
Combi tripod feet

Suitable for: Rotating laser
Heavy-duty rotating laser

Quick-Fix Ref.-No. 572 111

Innovative accessory to fasten an instrument quickly and securely on any tripod. Speeds up the process of setting up an instrument significantly.

Connecting thread: 5/8"

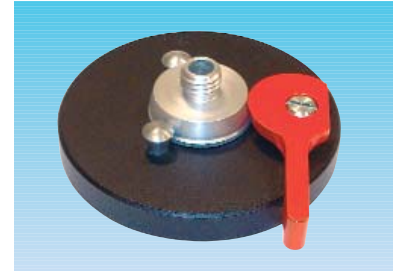

Ref.-No. 210 442

Tripod Ref.-No. 210 442

Min. effective height	appr. 1.77 m
Max. effective height	appr. 4.00 m
Retracted length	appr. 1.87 m
Weight	appr. 11.20 kg
Tripod head	flat, \varnothing 110 mm
Telescopic section	2-fold
Adjustable range of column	555 + 590 mm

Features: Indirect gear
Reinforced telescopes
Additional leg struts
Quick-clamping system
Circular bubble

Accessory: Combi tripod feet

Suitable for: Rotating laser
Heavy-duty rotating laser
Machine control

Elevating head Ref.-No. 570 111

To be mounted to any levelling tripod. The tripod can then be used as an elevating tripod.


Connecting thread: 5/8"

Adjustable range: 95 mm



Tripod star Ref.-No. 665 111

Ensures a reliable set-up of tripods on smooth floors.

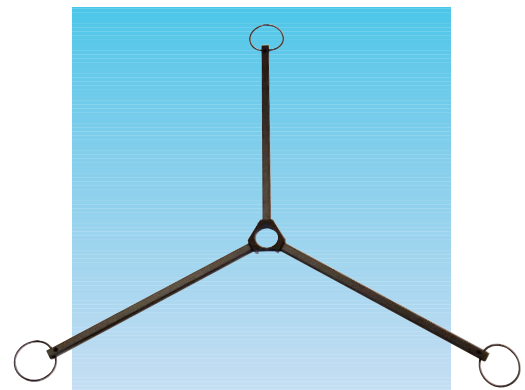

Representatives in Germany

Dipl.-Ing. Erich Feistauer
Handelsvertretung
Über dem Dorfe 9
07751 Bucha
Phone: (0 36 41) 60 73 33
Fax: (0 36 41) 21 61 37

Josef Wager
Industrievertretungen
Waidmannstrasse 32
89233 Neu-Ulm
Phone: (07 31) 71 97 13
Fax: (07 31) 71 09 30

Dipl.-Ing. (FH) Ralf Nagel
Wachsbleiche 28
53111 Bonn
Phone: (02 28) 43 21 15
Fax: (02 28) 48 34 38

Peter Jugel
Handelsvertretung
Auf der Bärenburg 5
99100 Salomonsborn
Phone: (03 62 08) 7 95 88
Fax: (03 62 08) 7 95 98

Olaf Kronstätt GmbH
Handelsvertretung
Dahlbreite 3
58708 Menden
Phone: (0 23 73) 6 06 83
Fax: (0 23 73) 6 36 54

Franz-Peter Nawrath
Handelsvertretung
Reiherallee 96
13503 Berlin (Heiligensee)
Phone: (0 30) 43 09 56 60
Fax: (0 30) 43 00 45 61

Robert Reith GmbH
Handelsvertretungen
Krügerstrasse 12 a
68219 Mannheim
Phone: (06 21) 87 30 14
Fax: (06 21) 87 29 97

Edmund Rosenheimer
Industrievertretungen
Eggentalerstrasse 12
85778 Haimhausen
Phone: (0 81 33) 27 67
Fax: (0 81 33) 68 38

Erich Tonigold
Handelsvertretungen
Liasstrasse 19
73527 Schwäbisch Gmünd
Phone: (0 71 71) 8 10 32
Fax: (0 71 71) 8 14 03

Foreign Agents

Belgium/Luxembourg
Prof Praxis C.V.B.A.
Scheibeekstraat 29
B-1540 Herne
Phone: (02) 3 56 37 52
Fax: (02) 3 56 21 78

Denmark
Henning Jepsen A/S
Formervangen 19
DK-2600 Glostrup
Phone: (0 43 46) 99 35
Fax: (0 43 43) 26 44

France
DERAGY Sarl
2, rue Daniel Berger
Z.A La Neuville
F-51100 Reims
Phone: 03 26 02 49 80
Fax: 03 26 02 61 01

Netherlands
Royal Regouin
International B.V.
Kerkstraat 14
NL-5431 DS Cuijk
Phone: (04 85) 31 43 43
Fax: (04 85) 31 36 52

Poland
MAXI GEO
ul. Sprzetowa 3
PL-10-467 Olsztyn
Phone: (0 89) 5 32 00 51
Fax: (0 89) 5 33 84 01

Russia
METRON
Leningradskij prospekt d. 57
RF-125057 Moscow
Phone: (0 95) 5 15 11 93
Fax: (0 95) 5 15 11 93

Switzerland
Fimex Messgerätebau AG
Hauptstrasse 5
CH-8259 Kaltenbach
Phone: (0 52) 7 42 00 20
Fax: (0 52) 7 42 00 29

Spain
Agente COHIGE S.L.
Unipersonal
C/Carrero Juan Ramón 12
E-28025 Madrid
Phone: (0 91) 4 69 43 98
Fax: (0 91) 5 65 01 54

Ukraine
Wolodymyr Moros
Hen.-Hryzaj-Strasse 5/7
UA-79 017 Lwiv / Lemberg
Phone: (03 22) 75 35 61
Fax: (03 22) 75 35 61

USA
Nedo
2200 Ampere Drive • P.O. Box 99556
Louisville, KY 40269-0556
Phone: 866-275-6336
Fax: 502-266-5280

Chile
Helga Rath y Cia. Ltda.
A.v. Luis Thayer Ojeda 610 Of. 102
RCH-Santiago de Chile
Phone: (2) 2 32 88 93
Fax: (2) 3 35 86 33



®

Precise surveying and measuring

Nedo GmbH & Co. KG
Hochgerichtstrasse 39-43 · 72280 Dornstetten
Germany
Phone +49/74 43/24 01-0 · Fax +49/74 43/24 01-45
www.nedo.com · info@nedo.com